




NEW!

Table height
electrically
adjustable

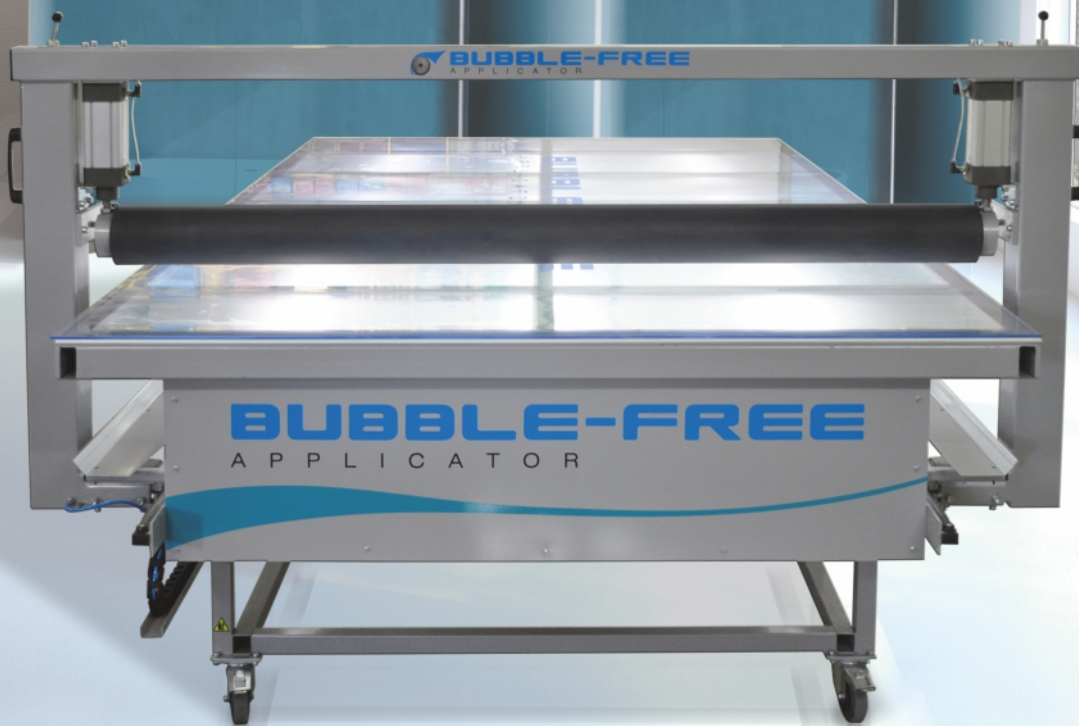

BUBBLE-FREE

A P P L I C A T O R 1500 • 1700 • 2200

BUBBLE-FREE APPLICATOR

Operators can mount and laminate digital prints and apply application tape to any flat surface, banner, table, flat furniture, PMMA up to thicknesses of 60 mm.

- Quick mounting without any bubbles or wrinkles
- Controlled application pressure prevents media stretching
- Easy positioning of material to be mounted
- Fast production speed for increased productivity
- Quick and easy to learn
- Self healing cutting mat

BUBBLE-FREE

AKKOR-DEKOR Ltd. • Hungary H-2225 Üllő, Pesti út 199-201.
Phone: +36 1 599-9234, +36 1 599-9235
E-mail: akkordekor@akkordekor.hu • www.bubblefree.hu



BUBBLE-FREE applicator can be ordered with:

- glass board and LED lighting
- MDF board and PVC mat

Can be ordered in customized dimensions.






The pressure roller has 15mm thick soft rubber coating to guarantee the bubble free application.

The pressure roller is controllable on both sides.

The pneumatic system uses FESTO parts. The pressure of the roller can be adjusted over a wide range by the pneumatic controller.

High durability paint in RAL colour 9006

The castors with brakes allow the table to be easily moved or fixed in position.

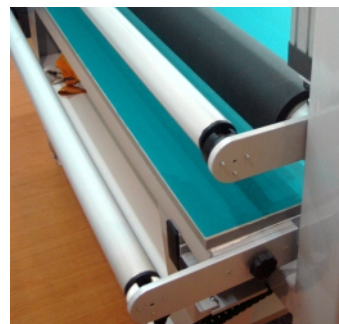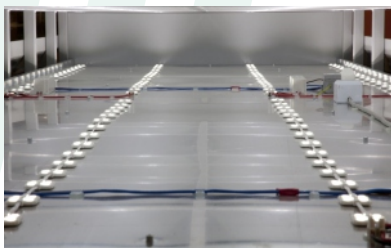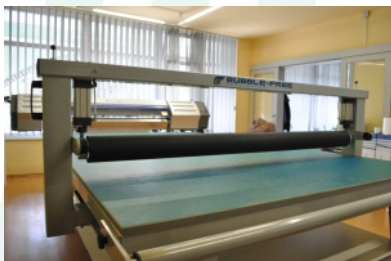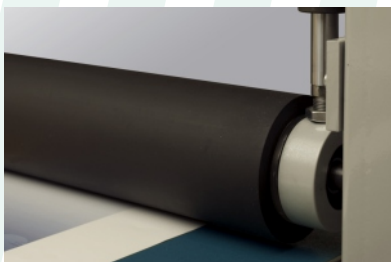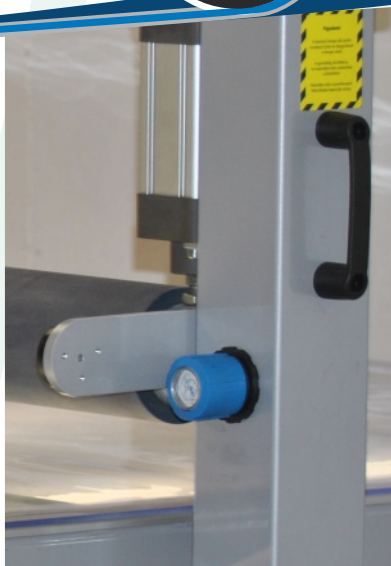

Specifications:	1500 · 1700 · 2200
Table width	1500, 1700, 2200 mm
Maximum working width	1450, 1640, 2140 mm
Maximum length	2800, 3400, 4000, 5400, 6000, 7000 mm
Maximum working length	2500, 3100, 3700, 5100, 5700, 6700 mm
Operation height	850 mm
Maximum thickness of media	60 mm
Diameter of the rubber roller	110, 132 mm
Machine weight	180, 270, 320, 480, 750, 840 kg
Warranty	1 year

We keep the rights for any future technical changes.

Optional accessories:

- silent compressor (85 l/min, 49-56 dB)
- roll holder at the end of the table
- 5 mm or 7 mm safety PVC cutting mat
- MDF shelf
- side tray
- maximum thickness of media is 130 mm
- extra roller for large tables
- electrical height adjustment between 850 and 1100 mm