



SEE FULL SYSTEM **SPECIFICATION**

OVERLEAF

OF THE PARTY OF TH

DAVE'S 70_{TH} BIRTHDAY

OX HOTEL

Desktop foiling and lamination from one compact unit



Laminates | Foils | Holographics

- Foiling, lamination and flaring effects are possible with this single desktop solution
- Class leading affordability
- Uses 3" (77mm) core rolls providing more cost effective production
- No need to have traditional UV coating for diverse effects
- Simple in-house process no expensive blocks or dies required















HOUSEHOLD



= 500mm H = 430mm

TOP FEATURES

- Ideal entry level machine for:
 - gloss & matt lamination
 - over-printable soft touch lamination
 - gloss & matt lamination
 - metallic & coloured foiling
 - holographic effect films
- Handles SRA3 + media
- Easy continuous feed
- Adjustable pressures for different applications
- Tension control
- De-curling bar for flatter sheets
- Heated top and bottom rollers designed to apply overall heat to substrates avoids silvering of laminates
- Auto stop function to save foil waste
- Cutting knife for end of job trimming
- Air cooling offers a wider media range
- Quiet operation
- Uses conventional household 220~240V power supply

YPICAL APPLICATIONS

- Packaging Presentation
- folders
- Business cards
- Certificates
- Book covers Wedding stationery

Menus

- Labels
- Swing tickets Point-of-sale Photo albums

Gift vouchers



Easy to use controls




De-curl bar



Air cooling system



Tension contro



Adjustable pressure







ColorFlare printer compatibility guide*

intec PRINTING SOLUTIONS

Intec ColorFlare has been developed to work with the Intec ColorSplash series and is compatible with the world's top digital printer manufacturers.



















*Call for confirmation of model compatibil	it
--	----

Technical specifications*	
Laminating speed	1.3m/min
Base substrate thickness	Lamination: 80gm² to 350gm² Foiling: 120gm² to 350gm²
Paper Size	Maximum: 330mm to 500mm Minimum: 180mm x 230mm
Warm-up time	5 minutes
Heating system	Infrared heater
Laminating temperature	Top roller: maximum150°C Bottom roller: maximum 100°C
Temperature control	Control panel push button
Speed control	Control panel push button
Display system	LCD display
Roller pressure	Adjustable manual handle
Film core size	77mm (3")
Air cooling system	Dual fan system
Temperature sensing method	Internal thermo-couple
Rear trimming knife	Blade for end of job trimming
Power requirement	AC 220~240V, 50/60Hz, 7A
Power consumption	1.5kw

A growing range of consumables...*

Lamination films

Various finishes including: gloss, matt and soft touch, for litho and digital print. Digital laminates are corona-treated for subsequent over-printing.



Foil flaring films

Available in a growing range of colours including: gold, silver, red, green, blue, violet, black, white and clear gloss. All can be applied direct to print.




Holographic flaring films

Such as: sparkle, milky way, crystal, carbon fibre... Perfect for adding premium effects to print.






CF350 footprint 500mm **Dimensions** W x L x H Weight (kgs) 580 x 500 x 430mm 35kg

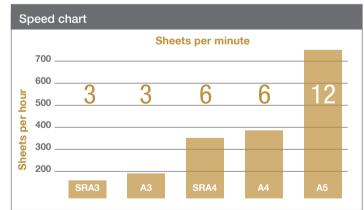

Laminates











Copper

Black Gloss



Green

White Gloss



Clear Gloss









Crystal Milky Way



Intec Printing Solutions Limited

Unit 11B, Dawkins Industrial Estate, Hamworthy, Poole, Dorset BH15 4JP UK Tel: +44 (0) 1202 845960 Email: sales@intecprinters.com

www.intecprinters.com

